


WARM AIR

POWER VENTED FLUE SELECTION DATA

Typical assembly of a Power Vented flue for SCA & ST Series units using internal combustion air

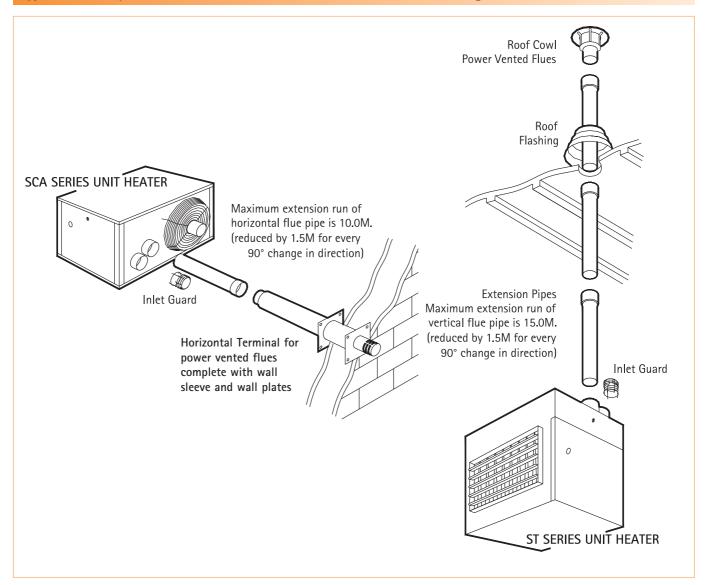

Ambi-Rad units for power vented flue (non-room sealed) applications must be fitted with an Inlet Guard.

SCA heaters may be flued vertically using a 90° elbow and Ambi-Rad roof cowl. ST series heaters may be flued horizontally using 90° elbow or may be ordered with side flue outlet spigot as shown.

Extension pipes and fittings are supplied complete with integral silicone sealing rings suitable for power vented flues.

Price List

Flue dia	Heater model	Item	Part No	Price £	Quantity	Total
80mm	SCA45	Wall outlet for powered vented flues	RCHC80	£46.00		
		Roof cowl	RCVC80	£17.00		
		Flue pipe c/w integral sealing rings 1m length	RC801000	£13.00		
		Flue pipe c/w integral sealing rings 0.5m length	RC80500	£9.00		
		Elbow 90°	RC8090	£9.00		
		Elbow 45°	RC8045	£7.50		
		Masterflash roof flashing	7700H	£39.00		
		Air inlet guard	RCIG80	£5.00		
					TOTAL	

The wall outlet is supplied complete with a galvanised wall sleeve of 94mm dia and requires a suitable wall opening. Outlet is supplied complete with plates, wall plugs and screws. Maximum wall thickness is 550mm.

		Air inlet guard	RCIG100	£8.00	
		Masterflash roof flashing	7700H	£39.00	
		Elbow 45°	RC10045	£7.50	
		Elbow 90°	RC10090	£9.00	
		Flue pipe c/w integral sealing rings 0.25m length	RC130250	£6.00	
		Flue pipe c/w integral sealing rings 0.5m length	RC100500	£10.00	
		Flue pipe c/w integral sealing rings 1m length	RC1001000	£14.00	
	STA/B/E 100-150	Roof cowl	RCVC100	£18.00	
100mm SCA 75-125 & Wall outlet for power v		Wall outlet for power vented flues	RCHC100	£53.00	
complete with plates, wall plugs and screws. Maximum wall thickness is 550mm					

TOTAL

The wall outlet is supplied complete with a galvanised wall sleeve of 114mm dia and requires a suitable wall opening. Outlet is supplied complete with plates, wall plugs and screws. Maximum wall thickness is 550mm

complete with plates, wan plays and serews. Waximam wan unexhess is osonim					
130mm SCA 150-300 &		Wall outlet for power vented flues	RCHC130	£60.00	
	STA/B/E 175-400	Roof cowl	RCVC130	£22.00	
		Flue pipe c/w integral sealing rings 1m length	RC1301000	£18.00	
		Flue pipe c/w integral sealing rings 0.5m length	RC130500	£15.00	
		Flue pipe c/w integral sealing rings 0.25m length	RC130250	£7.00	
		Elbow 90°	RC13090	£15.00	
		Elbow 45°	RC13045	£13.00	
		Masterflash roof flashing	7700H-1	£49.00	
		Air inlet guard	RCIG130	£11.00	

TOTAL

The wall outlet is supplied complete with a galvanised wall sleeve of 144mm dia and requires a suitable wall opening. Outlet is supplied complete with plates, wall plugs and screws. Maximum wall thickness is 550mm

Commi					
	TOTAL PRICE FOR FLUE				
	DISCOUNT%				
	NETT PRICE				










Ambi-Rad Limited Fens Pool Avenue Brierley Hill West Midlands

DY5 1QA United Kingdom



Due to continuous product innovation, Ambi-Rad reserves the right to change product specification without due notice.

